


WINDOW


INSIDE DIMENSION	CAPACITY		WEIGHT
	(GAL)	(CU FT)	(LBS)
2'	829	102.25	10,295
2.5'	1,056	128.17	11,207
3'	1,283	154.08	12,120
3.5'	1,510	180.0	13,032
4'	1,737	205.92	13,944
4.5'	1,964	231.83	14,858
5'	2,190	257.75	15,770

DESIGN NOTES:

1. CONCRETE - 5,000 PSI, 28 DAYS
2. REINFORCING STEEL CONFORMS TO LATEST ASTM A615 AND A82 OR A185 SPECS.
3. H-20 DESIGN LOADING PER AASHTO HS-20-44

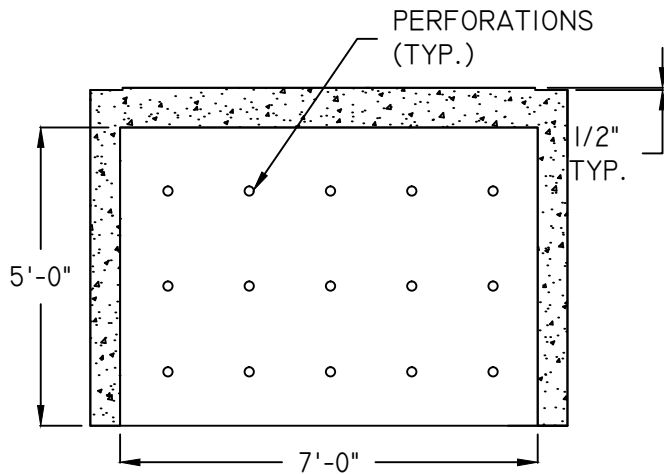

PERFORATED WALL

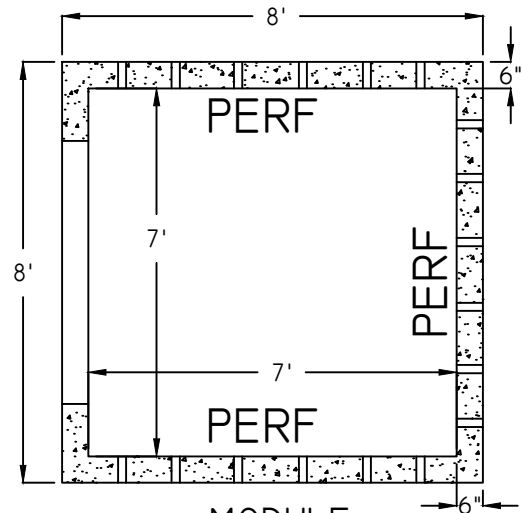

MODULE SCHEMATIC

**SINGLE ROW  
END**

(860) 413-3050  
www.retain-it.com